200 kVA CNG Generator Set

Simplified Technical Data Sheet | Model PLG-200GF | 50 Hz

PRIME

160 kW / 200 kVA

STANDBY 176 kW / 220 kVA

PRODUCT OVERVIEW



OPEN TYPE REFERENCE



SILENT TYPE

MAIN SPECIFICATIONS

Model	PLG-200GF	**Fuel**	CNG / natural gas
Prime power	160 kW / 200 kVA	**Standby power**	176 kW / 220 kVA
Rated voltage	400/230 V	**Rated current**	286 A
Frequency	50 Hz	**Rated speed**	1500 rpm
Power factor	0.8	**Configuration**	Silent
Controller	SmartGen HGM6120N	**Speed governor**	Electronic

Rating basis: altitude below 1000 m and ambient temperature below 40 °C. Other voltages: 380/220 V, 415/240 V and 440/254 V on request. Confirm the listed 286 A rated current (approximately 289 A at 200 kVA and 400 V) and the 8.9 L displacement against the listed bore x stroke.

ENGINE AND ALTERNATOR

GAS ENGINE	
Model	Pulita / PCTA9L-NG
Configuration	Inline, 4-stroke, 6-cylinder
Bore x stroke	114 x 135 mm
Displacement	8.9 L
Aspiration	Turbocharged
Cooling	Closed-loop water cooling
Ignition	Electronic
Start method	Electric
Gas mixer	Pre-mix
Oil pressure	345-483 kPa
Oil temperature	<80 °C
Max. exhaust temp.	600 °C ±25 °C

ALTERNATOR	
Model	Pulita / FD3F
Rated output	160 kW / 200 kVA
Standby output	176 kW / 220 kVA
Connection	3-phase, 4-wire
Power factor	0.8
Excitation	Brushless
Voltage regulation	Automatic AVR
Insulation	Class H
Protection	IP23
Cooling	Air cooled

LOAD	GAS CONSUMPTION	OPERATING REQUIREMENTS
100% prime	52.8 m³/h	Confirm gas quality and inlet pressure for this model.
75% prime	40.9 m³/h	
50% prime	27.2 m³/h	

200 kVA CNG Generator Set

Simplified Technical Data Sheet | Model PLG-200GF | 50 Hz

PRIME

160 kW / 200 kVA

STANDBY 176 kW / 220 kVA

CONTROLLER AND PROTECTION




SmartGen HGM6120N
Starts and stops the generator remotely. Provides LCD monitoring, alarms and USB configuration. Monitors mains power and supports automatic mains failure (AMF) transfer control.

Protection functions
Monitors engine speed, oil pressure and coolant temperature, with generator electrical protection and start-failure alarms.

Controller functions: SmartGen HGM6100N series manual. Panel image is for reference.

DIMENSIONS AND CONFIGURATION

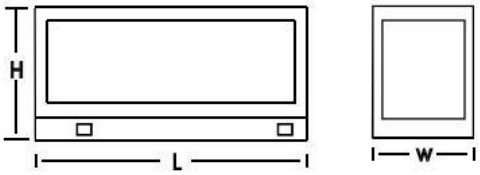

SILENT TYPE
3400 x 1300 x 2000 mm
Gross weight: 2750 kg
Canopy sound level: 70-75 dB*
Canopy included with silent type

Dimensions are listed as L x W x H. Confirm the final shipping dimensions. *Canopy sound level is listed without a measurement distance or test conditions.

STANDARD SUPPLY SCOPE

1. Gas engine
2. Brushless alternator with AVR
3. Digital controller and control cabinet
4. Steel base frame with vibration isolators
5. Gas pressure regulator
6. Ignition system
7. IMPCO air-fuel mixer
8. Electronic speed governor
9. Flame arrester
10. Explosion-protection system
11. MCCB, radiator fan, muffler and air filter
12. Two 12 V maintenance-free starting batteries
13. Installation accessories, toolkit and manuals

WARRANTY

15 months or 1500 operating hours from shipment, whichever comes first. Coverage applies to verified generator set defects and excludes natural disasters, transport or handling damage, improper operation and other external causes. We supply covered spare parts free of charge. After the warranty period, spare parts are available at cost.

Confirm technical data and supplied equipment in the final order documents.